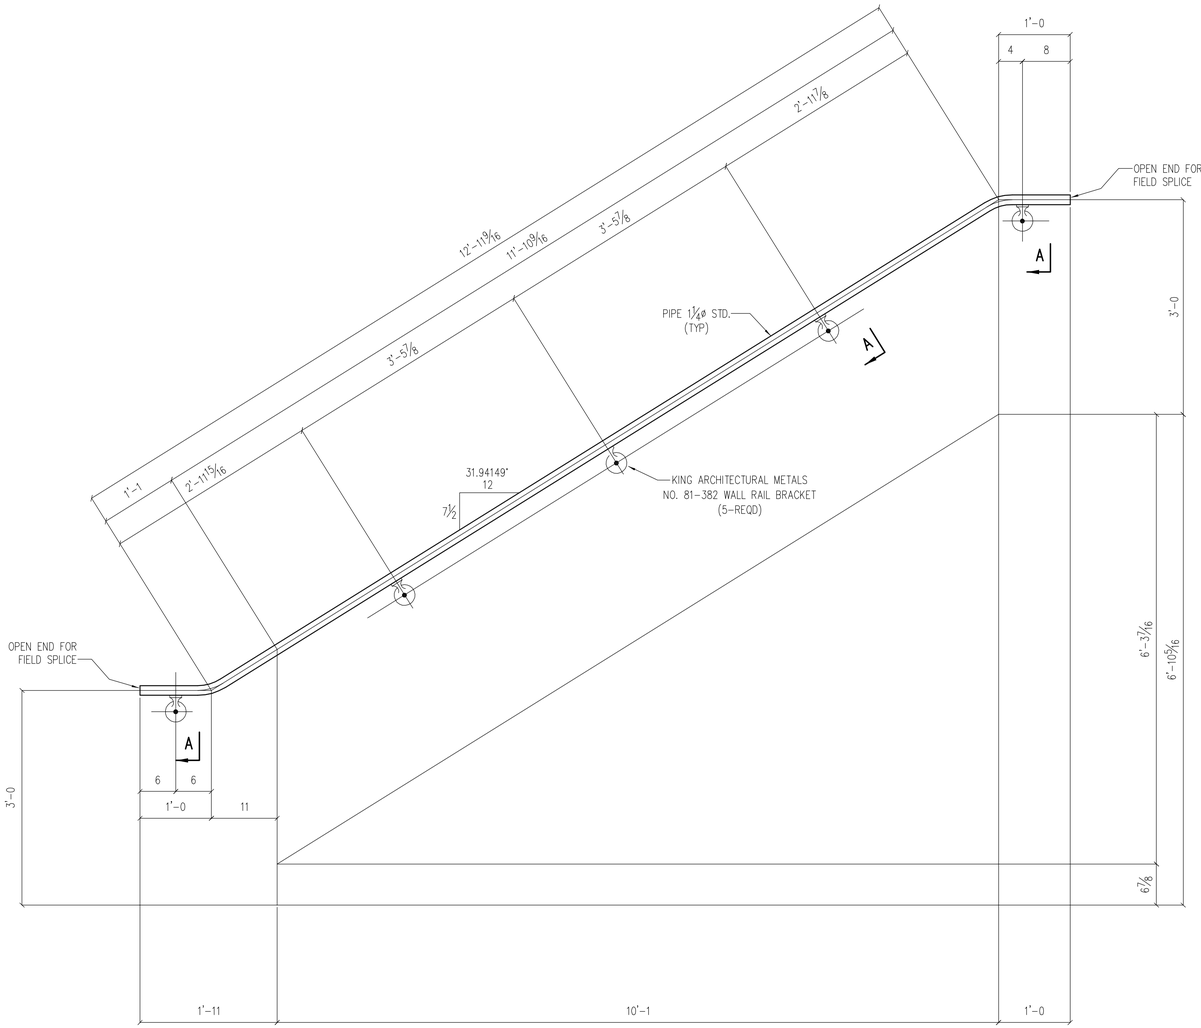

ONE WALL RAIL S125H1

5 - LAG BOLTS ⅜ø x 2½



SECTION A

Line	Mark	No.	Tot	Description	Length Ft	Length In	Piece Mark	Remarks	Weight	Order Item
1	S125H1	1		WALL RAIL						
2		1	1	PIPE 1¼ø STD.	15	LIN. FT.		A53B		
3		5	5	KING ARCHITECTURAL METALS NO. 81-382 WALL RAIL BRACKET				OR EQUAL		
4										
5										
6	S125H2	1		WALL RAIL						
7		1	1	PIPE 1¼ø STD.	12	LIN. FT.		A53B		
8		4	4	KING ARCHITECTURAL METALS NO. 81-382 WALL RAIL BRACKET				OR EQUAL		
9										
10										
11										
12										
13										
14										
15										

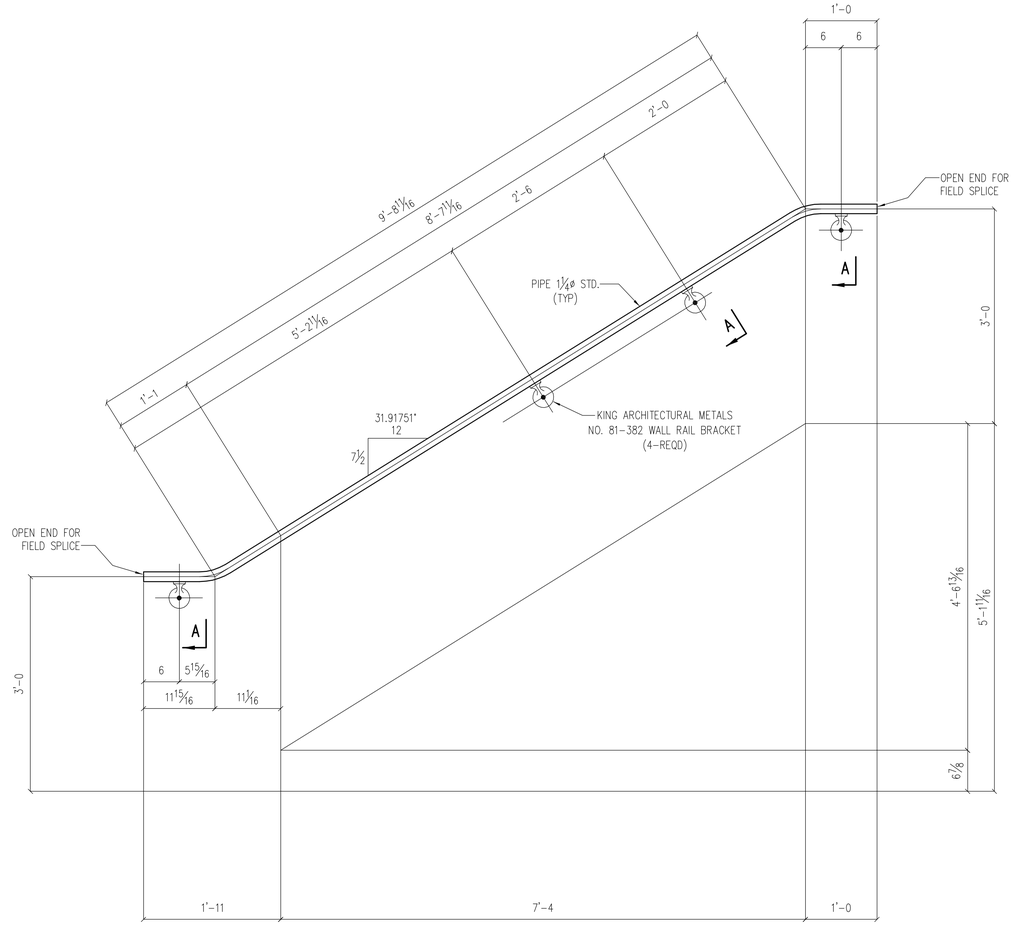

ONE WALL RAIL S125H2

4 - LAG BOLTS ⅜ø x 2½

SHOP NOTE !

1. ALL PIPE BENDS, $3\frac{3}{16}$" AT CENTERLINE.
2. WELD ALL PIPE JOINTS AND GRIND SMOOTH.
3. ALL STEEL A36 U.N.
4. PAINT - 1 SHOP COAT

REF: SE101-SE108

STAIR NO. 2 - AREA A

DATE
S

Rev.	Date	Description	By

IRWIN STEEL
15740 Highway 114 ~ Justin, Texas 76247
Phone (817) 636-2508 ~ Fax (817) 636-2506

PRINT RECORD

Date	Quan.	For	Date	Quan.	For
DATE		APPROVAL			
DATE		SHOP			

Job Name:	STANDARD PAN STAIR IN STEEL FRAME
Location:	CITY, TEXAS
Customer:	CONTRACTOR
Architect:	ARCHITECT

DRAWN: THX	JOB NO: 1138	SHEET NO. S125
CHECKED: HAL	CAD NO:	